

Technical Specifications

VERSION 2019.07-001





Hybrid 1020

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
HYH-102x45	HYN-102x45	1020 x 450 mm	7	64 Watts
HYH-102x60	HYN-102x60	1020 x 600 mm	7	88 Watts
HYH-102x75	HYN-102x75	1020 x 750 mm	7	111 Watts
HYH-102x90	HYN-102x90	1020 x 900 mm	7	135 Watts
HYH-102x105	HYN-102x105	1020 x 1050 mm	7	158 Watts

NOTES

- This is a Low Voltage product
- Transformer required TRTR220-24V (Sold separately)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm² Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)
- Plug-In version not available


STANDARD FINISHES

Mirror Polished	Brushed	Matt Black/White	Gunmetal	Brushed Gold
Stainless Steel	Stainless Steel	Painted	PVD	PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 24 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA	
Material	Electrical Connection		
Stainless Steel 304	Concealed Wiring only - any leg (Transformer required)	HEATING TIME 30 MINUTES	\bigcirc
Finish Mirror Polished	Heating Method	30 1411110 1 23	
	Dry Internal Heating Element		
Ingress Protection IPX5 (Suitable for wet areas)	Non-Heated version available	WARRANTY 10 YEAR	10



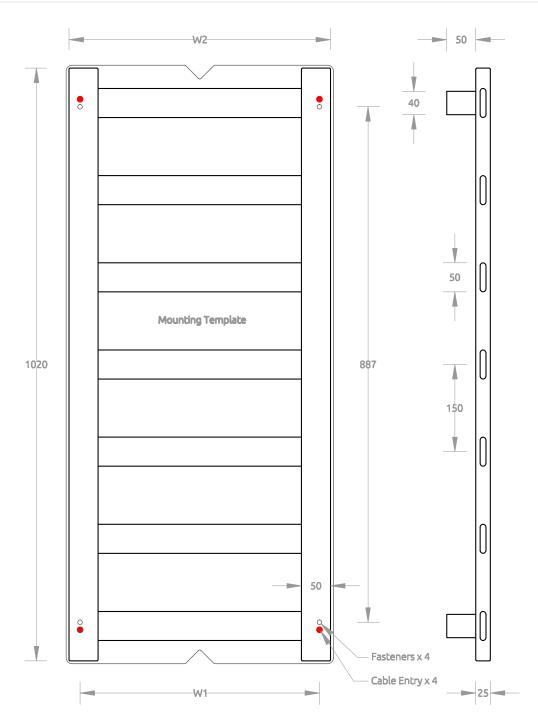



VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
HYH-102x45	HYN-102x45	412mm	450mm
HYH-102x60	HYN-102x60	562mm	600mm
HYH-102x75	HYN-102x75	712mm	750mm
HYH-102x90	HYN-102x90	862mm	900mm
HYH-102x105	HYN-102x105	1012mm	1050mm